


FRONT VIEW

Pin #	Assignment
1	Bottom
2	Right
3	Top
4	Left

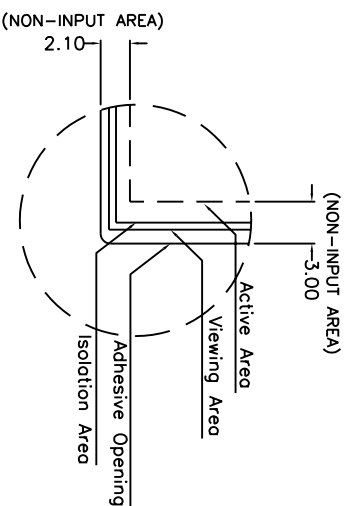

DETAIL A

NOTES:

1. ITO GLASS THICKNESS : 1.80mm
2. OVERALL THICKNESS : 5.20±0.20mm (W/KAPTON TAPE & GASKETS INCLUDED) REFERENCE ONLY
3. CONNECTOR AND PINOUT AS INDICATED
4. FRONT SURFACE : ANTI-GLARE HARDCOAT
5. LAYER TO LAYER ASSEMBLY TOLERANCE: ±0.50mm
- ▲ 6. TAIL TYPE : IMMESSION GOLD PLATED FPC WITH AMP-C (WITH LATCH) CONNECTOR
7. KAPTON TAPE WIDTH : 15mm
8. (*) KAPTON TAPE OUTSIDE THE BACKER
9. OTHER SPEC : SEE APPROVAL SHEET



NO.	DATE	REVISION	DESCRIPTION	CHK
A	MAR 8 . 2007	AMP-C Connector With Latch Modify	ALEX	

CHIEF OF DESIGN	APPROVED	DATE	REV.
ENGINEER	Alex	MAR 8 . 2007	A
DRAWN BY	Jerry		

TOLERANCES UNLESS SPECIFIED	PRODUCT NAME	DWG NO.	SCALE
.XX ± 0.50	9542-2	9542-2-1-01	1:1
.XXX ± 0.30			

Apex Material Technology Corp.

UNIT: mm