
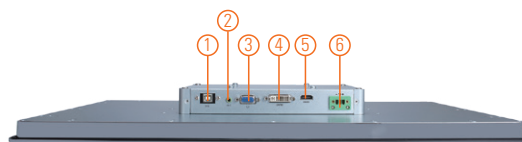


P6217W

21.5" FHD TFT Widescreen Industrial LCD Monitor

Features

- 21.5" FHD TFT 250 nits with projective capacitive multi-touch or resistive touch
- NEMA 4/12 (IP65) compliant flat panel monitor
- Supports panel mount, wall mount and VESA mount
- Full range screw-type (locked) AC-in or 12V/24V DC-in (optional)
- VGA, HDMI and DVI with multi-signal inputs

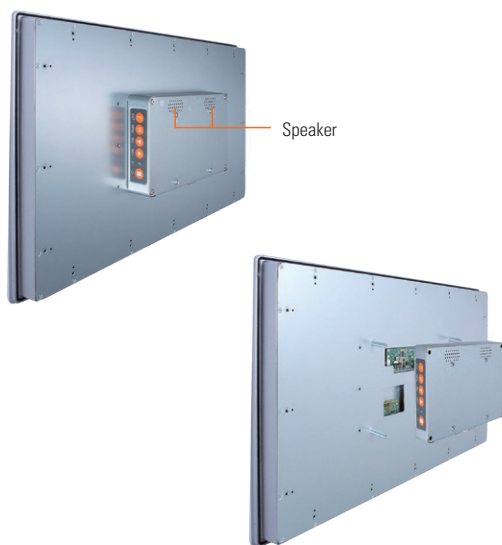

1. RS232 or USB for touch
2. Audio (Line in)
3. VGA
4. DVI-D
5. HDMI
6. Power input Terminal block or Screw type

Introduction

The P6217W is a slim-type industrial LCD monitor with flat front bezel design, which adopts 21.5-inch 250 nits full HD LCD display and supports multi-signal interfaces including DVI, VGA, S-Video, Video. Featuring IP65 (NEMA 4)-rated front bezel, screw-type adaptor plug design, and 12/24V DC-in, the 21.5-inch P6217W is designed to fit for all kinds of industrial environments. Moreover, the P6217W supports panel mount, wall mount or VESA FPMPMI (Video Electronics Standards Association Flat Panel Monitor Physical Mounting Interface) mounting. With the compact mechanism design, the P6217W can be deployed easily in any space-limited place. It is especially suitable for POI/POS, HMI and all kinds of heavy-duty industrial fields.

Specifications

| | | |
|---------------------------------|--|-------------------|
| Front Bezel | NEMA 4/12 (IP65)-compliant, flat front bezel | |
| Mounting | Panel mount, wall mount and VESA arm FPMPMI mounting (video electronics standards association Flat Panel monitor physical mounting interface) | |
| LCD Panel | Display | 21.5" FHD TFT LCD |
| | Max. Resolution | 1920 x 1080 |
| | Max. Colors | 16.7 M |
| | Active Area (mm) | 476.64 x 268.11 |
| | Pixel Pitch (mm) | 0.24 x 0.24 |
| | Response Time | 18 ms |
| | Backlight | LED |
| | Backlight MTBF | 50,000 hrs |
| | Viewing Angle (H/V) | 178°/178° |
| | Contrast Ratio | 3000 (TYP.) |
| Brightness (cd/m ²) | 250 nits | |
| Display Control | OSD (on screen display) | |
| Display Mode | VGA 640 x 350 (70 Hz), VGA 640 x 480 (60/72/75 Hz), VGA 720 x 400 (70 Hz), SVGA 800 x 600 (60/72/75 Hz), XGA 1024 x 768 (60/72/75 Hz), WXGA 1366 x 768 (60 Hz), FHD 1920 x 1080 (60 Hz) | |
| Input Signal | VGA HDMI DVI (only for DVI-D) Touchscreen: USB interface | |


Specifications

| | |
|-----------------------|--|
| I/O Connectors | 1 x RS-232 or USB for touchscreen version 1 x Audio (Line-in) 1 x VGA 1 x DVI-D 1 x HDMI 1 x DVI 1 x Power input with Terminal block(DC Version) or Screw type connector(AC version) |
| Audio | 2 x Speaker |
| Power Supply | DC version: 24VDC AC version: 100 - 240VAC-DC, 36W power adapter |
| Power Consumption | 26W |
| Touchscreen | Projective capacitive multi-touch or 5-wire resistive touch |
| Dimensions | 547.59 mm (21.56") (W) x 339.05 mm (13.34") (D) x 53 mm (2.09") (H) |
| Packing Dimensions | 700 mm (27.56") (W) x 185 mm (7.28") (D) x 510 mm (20.07") (H) |
| Weight (net/gross) | 6.42 kg (14.15 lb)/7.78 kg (17.15 lb) |
| Operating Temperature | 0°C to +45°C (+32°F to +113°F) |
| Relative Humidity | 20% to 90% @ +40°C, non-condensing |
| Certifications | CE |

Packing List

- 1 x P6217W unit
- 1 x VGA cable
- 1 x USB cable (for resistive/capacitive touch screen only)
- 1 x Audio cable
- 1 x Adapter (AC Version only)
- 1 x Power cord (AC Version only)
- 1 x 3-PIN Terminal block (DC Version only)

Dimensions

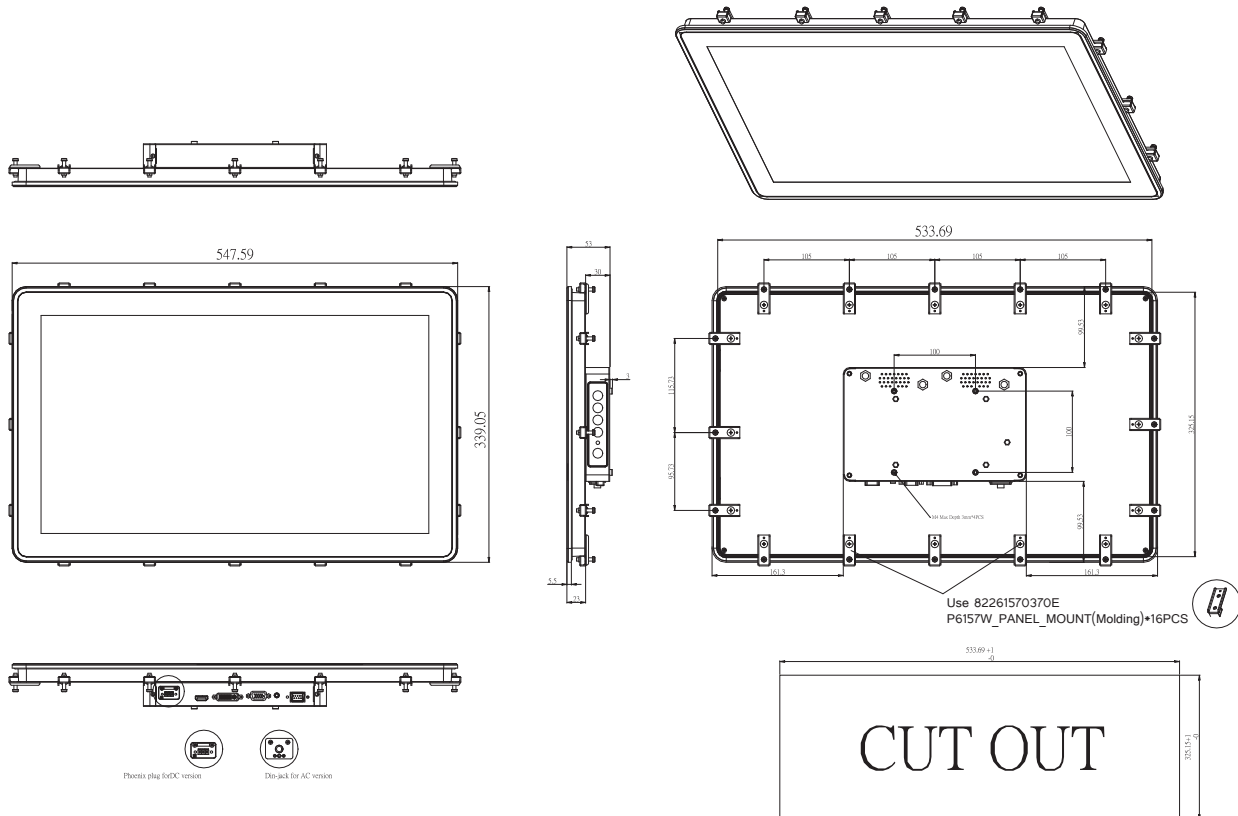

Ordering Information

| P6217W | |
|---------------------------------------|--|
| P6217WPC-AC-U-US-EU (P/N: E226217100) | 21.5" Industrial Monitor with Capacitive Touch Screen, AC Version |
| P6217WPG-AC-US-EU (P/N: E226217101) | 21.5" Industrial Monitor without Touch Screen, AC Version |
| P6217WPR-AC-U-US (P/N: E226217105) | 21.5" Industrial Monitor with Resistive Touch Screen, AC Version |
| P6217WPC-24VDC-U (P/N: E226217102) | 21.5" Industrial Monitor with Capacitive Touch Screen, 24VDC Version |
| P6217WPG-24VDC (P/N: E226217103) | 21.5" Industrial Monitor without Touch Screen, 24VDC Version |
| P6217WPR-24VDC-U (P/N: E226217104) | 21.5" Industrial Monitor with Resistive Touch Screen, 24VDC Version |

- * Other configuration by request
- * Specification and certifications may vary based on different requirements

Optional Accessories

| | |
|--------------|----------------------------------|
| 5946L203800E | HDMI cable |
| 59461713400E | DVI-D cable |
| 881262170A0E | Panel mount kit |
| 881231770A0E | Wall mount kit |
| E221177116 | Desktop stand for 15.6" to 21.5" |