


# AX6156LE

4U 14-slot Rackmount Chassis

## Features

- Three 5.25" and one 3.5" HDD drive bays
- One 12 cm ball-bearing fan (two 12 cm fans for optional)
- Supports maximum 14 slot backplane via PICMG SBCs or ATX motherboards
- Hot-swap redundant power supply supported

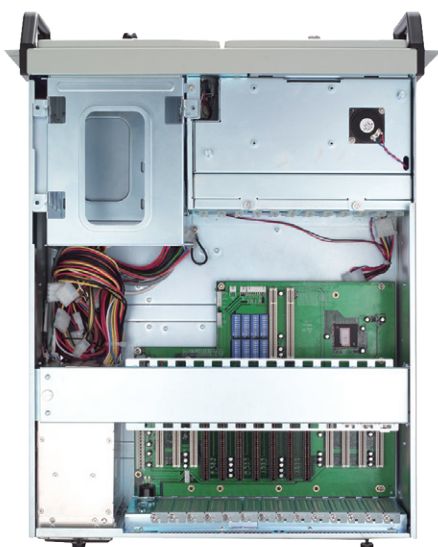

▲ Top view



## Specifications

Standard Color	Beige
Construction	Heavy-duty steel
Drive Capacity	Exposed 3 x 5.25" HDD drive bay 1 x 3.5" HDD drive bay
Cooling	1 x 12 cm ball-bearing fan (88 CFM/each) with a removable filter (two fans for optional) Front panel indicators: 1 x power on/off; 1 x HDD
Front Panel Controls	1 x Power on/off 1 x System reset
Front Panel Connectors	1 x USB 1x PS/2 5-pin keyboard

Pre-punched Panel	2 x 9-pin; 1 x DIN 5-pin keyboard
System Board	PICMG SBCs, ATX motherboards or IMB series
Expansion Interface	14-slot backplane
Speaker	1 x 0.3W speaker
Operating Temperature	0°C to +40°C (+32°F to +104°F)
Dimensions	484.7 ± 1.0mm (19.08") (W) x 537.35 ± 1.0mm (21.16") (D) x 176.7 ± 1.0mm (6.96") (H)
Weight (net/gross)	18 kg (39.68 lb)/19.5 kg (43 lb)

## Ordering Information

AX6156LEWB (P/N: E206156500)	4U 14-slot beige rackmount chassis for full-size SBC w/o PSU
AX6156LETB (P/N: E206156501)	4U 14-slot black rackmount chassis for full-size SBC w/o PSU
AX6156LETM (P/N: E206156502)	4U 7-slot black rackmount chassis for ATX w/o PSU
AX6156LEWM (P/N: E206156525)	4U 7-slot beige rackmount chassis for ATX SBC w/o PSU

\*Specifications and certifications are based on options and may vary.

\*\* T-Black color; W-Beige color

## Backplane Options

### PICMG 1.3

Models	Slots per Segment (ISA/PCI/PCIe/CPU)	Segment
FAB100	4/4/5/1	Single
FAB101	0/13/0/1	Single
FAB112	0/10/2/1	Single
FAB113	0/4/8/1	Single
FAB114	0/8/4/1	Single
FAB119	0/10/2/1	Single

## Power Supply Information

50904B24010E	ATX 400W FSP-400-70PFL (SK)
50916A06000E	ATX 600W SS-600ES2
50914B09620E	ATX AC_AUTO 400W-HRP MRW-6400P (RC)

## Optional Accessories

50761222000E	LGA1151/1155/1156 CPU cooler
72061560000E	3.5" to 5.25" HDD bracket (Need to buy a pair)
E393242100	AX93242-RC HD audio converter kit
593836A0030E	Power cable SATAx2, L=150mm (RC)
594G5208010E	SATA3 cable 180D w/B.sleeve, L=50cm
594G5208000E	SATA3 cable 180D w/lock&B.sleeve, L=50cm
59380402010E	COM port cable w/bracket, P=2.54mm, L=300m
5938A808010E	USB cable w/bkt USBx2, 2X5 (10P-Key)

## Dimensions

